

RP 1280

Luminaire: PAR, halogen, 1200W/80V
04°, PGJX50



Type

Conventional line

Family

Beamlight

Source

Halogen

Power

1200W

Connectors

Cable without plug

Lamp holder

PGJX50

Voltage

80V

Product sizes

12.5Kg

Pack sizes

505mm x 555mm x 560mm

0.157m³

DWG

Available on website

User manual

Available on website


Video

(<http://www.youtube.com/watch?v=ktJBUTL0qX4>)


Technical features

- Aluminum housing for high heat dissipation by natural ventilation
- Filter frame lockable top cover
- Yoke with clutch-locking system
- Adjustable yoke for fixture balancing
- Easy access to the lamphouse for fast maintenance
- 99,99% polished and treated aluminum reflector
- ARC version on request, with 3-way DMX control of tilt, pan and focus

Sizes (in mm)

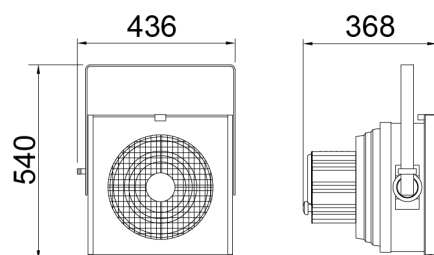

Light output diagram

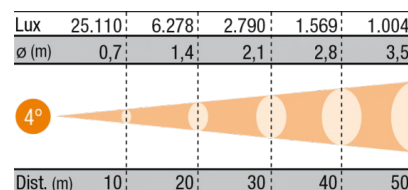

Accessories

ARC STAGE/2 +

Yoke: 2-way DMX motorized

ARC STAGE/3 +

Yoke: 3-way DMX motorized

FUNE

Acc: Safety net with spring hook

GAC

Acc: Hook clamp for 40/50mm tube

HC/075

Acc: Half swivel coupler 75kg max

TC 1280

Acc: Colour frame

TE 1280 SC

Acc: Electronic transformer

TM 1280 SC

Acc: Magnetic transformer