


D1301 PL-07



Type: Dynamic, Moving coil.  
 Freq. response: 40 to 16.500 Hz  
 Polar Pattern: Cardioid  
 Sensitivity (1000 Hz): 1,7 mV/Pa\*  
 (\*1 Pa = 94 dB SPL)  
 Max. SPL: 137 dB  
 Impedance: 600 Ohm  
 Power supply: none  
 Connector: 3p. XLR (male-type)  
 Dimensions: Ø 32 mm x L 157 mm  
 Net. Weight: 0,245 kg

Frequency Diagram

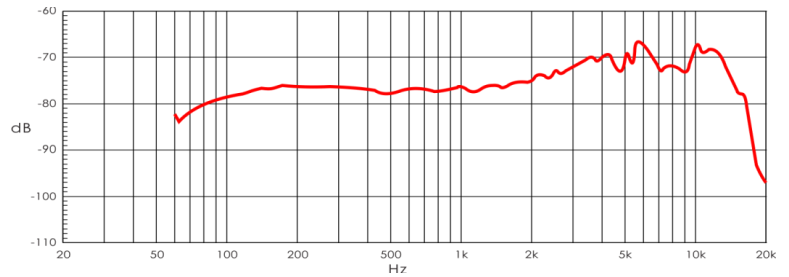


D1302 PL-07B



Type: Dynamic, moving coil.  
 Freq. response: 50 to 16,000 Hz  
 Polar Pattern: Cardioid  
 Sensitivity (1000 Hz): 2,6 mV/Pa\*  
 (\*1 Pa = 94 dB SPL)  
 Max. SPL: 137 dB  
 Impedance: 600 Ohm  
 Power supply: none  
 Connector: 3p. XLR (male-type)  
 Dimensions: Ø 42 mm x L 160 mm  
 Net. Weight: 0,271 kg

Frequency Diagram

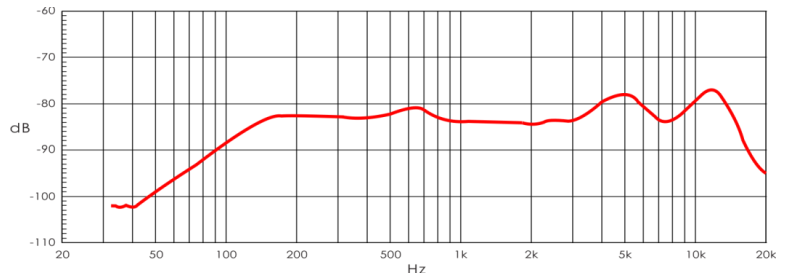


D1303 PL-08



Type: Dynamic, moving coil.  
 Freq. response: 50 to 16.500 Hz  
 Polar Pattern: Cardioid  
 Sensitivity (1000 Hz): 1,8 mV/Pa\*  
 (\*1 Pa = 94 dB SPL)  
 Max. SPL: 137 dB  
 Impedance: 600 Ohm  
 Power supply: none  
 Connector: 3p. XLR (male-type)  
 Dimensions: Ø 51 mm x L 160 mm  
 Net. Weight: 0,315 kg

Frequency Diagram

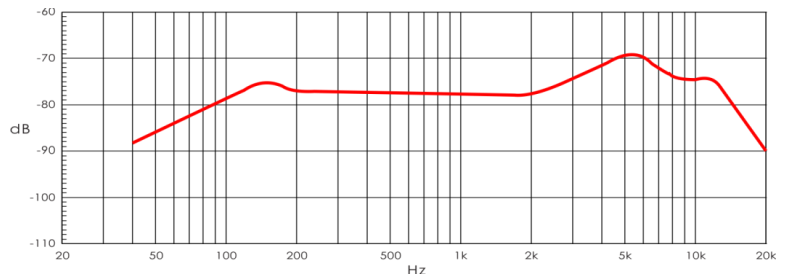


D1304



Type: Dynamic, Moving coil.  
 Freq. response: 50 to 16.500 Hz  
 Polar Pattern: Cardioid  
 Sensitivity (1000 Hz): 1,8 mV/Pa\*  
 (\*1 Pa = 94 dB SPL)  
 Max. SPL: 137 dB  
 Impedance: 600 Ohm  
 Power supply: none  
 Connector: 3p. XLR (male-type)  
 Dimensions: Ø 51 mm x L 160 mm  
 Net. Weight: 0,298 kg

Frequency Diagram

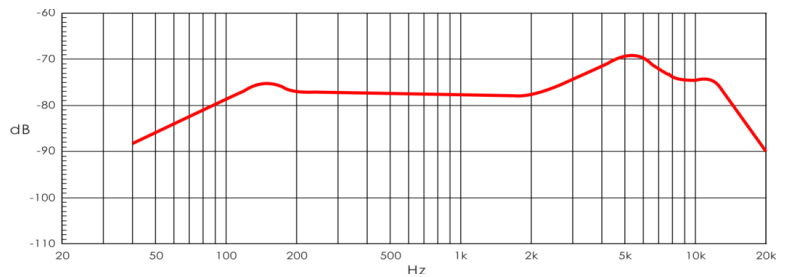

D1305 PL-08B



Type: Dynamic, moving coil.  
 Freq. response: 50 to 16.000 Hz  
 Polar Pattern: Cardioid  
 Sensitivity (1000 Hz): 2,9 mV/Pa\*  
 (\*1 Pa = 94 dB SPL)  
 Max. SPL: 137 dB  
 Impedance: 600 Ohm  
 Power supply: none  
 Connector: 3p. XLR (male-type)  
 Dimensions: Ø 51 mm x L 160 mm  
 Net. Weight: 0,28 kg

Frequency Diagram

